

# Avatar 8 - 12 SD

 **HORSCH**



COMPACT, EFFICIENT AND VERSATILE



## Avatar 8 - 12 SD

PERFECT SEED PLACEMENT AND WIDE RANGE OF APPLICATIONS  
DUE TO SINGLEDISC SINGLE DISC SEED COULTER

- Wide range of applications from direct seeding to mulch seeding and to the offset method
- High operational speed up to 15 km/h

- Coulter pressure up to 350 kg per coulter
- 25 cm row spacing perfect for mechanical weeding management



The Avatar can be used in different situations due to the individually depth controlled disc coulters. It is ideal for direct seeding but can also be used on cultivated soils. Due to the robust design and the SingleDisc single disc coulters operational speeds of up to 15 km/h can be achieved. The standard double or triple tank allows for the flexible application of up to three components. The optional MiniDrill allows for applying another 400 l of a fourth component and offers maximum flexibility. The 1-row design with a row spacing of 25 cm is ideal for mechanical weed management in combination with a HORSCH Transformer VF. The interaction of single disc coulters and seed skid ensures a safe opening of the furrow. At the same time, harvest residues are removed from the furrow. The result is an optimum contact of seed and soil for quick and safe emergence.

The Avatar SD is not only appreciated in the direct seeding sector, even on conventional farms you can find the Avatar with its SingleDisc seed coulters. The special feature of the machine is that it cannot only be used for direct seeding but also on cultivated soils. Due to various environmental influences, many farmers go for a new kind of direct seed, the so-called "rotative direct seed". This means that direct seed is carried out in certain conditions, e.g. after the rape harvest. However, if the conditions do not allow for this, a tillage pass can also be carried out.



Low horsepower requirement despite 12 m working width



Direct seed after grain maize

# SingleDisc

PRECISE SEED PLACEMENT DUE TO INDIVIDUAL DEPTH CONTROL



The individually depth controlled SingleDisc coulters have specially been designed for the Avatar line. Due to its individuality and flexibility, it can be adapted to the most different sowing conditions:

- Direct seed
- Mulch seed
- Conventional tillage
- In standing catch crops
- On stony and very heavy clayey soils

The interaction of single disc coulters and seed skids ensures a safe opening of the furrow. At the same time, harvest residues are removed from the furrow. The result is an optimum contact of seed and soil for quick and safe emergence.

Via the rubber torsion suspension a coulters pressure of up to 350 kg per coulters can be transferred. The coulters pressure can be adjusted mechanically or electrically via the terminal. All pivot points and connections at the coulters are maintenance-free.

The durable, maintenance-free bearings on all rotating parts guarantee a long service life and operational reliability. The seed skid is equipped with a carbide wear edge for a long service life. It can even be further protected with the HM+ version. The stable depth control wheels guarantee a precise depth control of the coulters in changing or difficult soils. This is due to different, co-ordinated adjustments of the seed coulters and optional equipments. Due to the lateral angle of 6° and a vertical angle of 3° of the single disc coulters, the seed is placed diagonally below the surface. Depending on the conditions, you can choose between a Uniformer and a catching roller.

- Individual depth control by means of depth control wheel
- Single disc coulters with seed skid
- Ideal for direct seed, mulch seed and after conventional tillage
- Outstanding for stony, very heavy and clayey soils
- Coulters pressure up to 350 kg
- Maintenance free



SingleDisc – perfect soil following due to depth control wheel



Finely graduated individual depth adjustment without tools



SingleDisc in organic conditions

# Hopper options

## VERSATILE HOPPER SYSTEM – UP TO FOUR COMPONENTS ENSURE MAXIMUM FLEXIBILITY

With the Avatar 8 to 12 SD you can choose between a double hopper (60:40) with a capacity of 6 300 l and the triple tank with a partition of 30:10:60 with a capacity of 6 400 l. As an option, a MiniDrill with a capacity of 400 l can be mounted, thus allowing for applying up to four components. Thus, everyone can choose the perfect hopper combination for their requirements. The advantage of the multi-hopper system is that fine seeds and coarse seeds can be transported separately and no separation takes place.

- Double hopper with 6 300 l capacity and 60:40 partition
- Triple tank with 6 400 l capacity and 30:10:60 partition
- Optional: MiniDrill with 400 l capacity



Large hopper opening



Hinged screens to prevent contaminations in the hopper

# Three to four components with a capacity of 400 l

The capacity of the MiniDrill G&F amounts to 400 l. It increases the efficiency of the machine and acts as a third or fourth component.

- MiniDrill G&F capacity: 400 l
- Increases the efficiency of the machine and, depending on the hopper, acts as a third or fourth component




Up to four components due to the 400 l MiniDrill

# Half-width shut-off

The mechanical half-width shut-off is standard equipment for all machines. As an option you can choose an electrical half-width shut-off via the ISOBUS Terminal.


- Standard with mechanical half-width shut-off
- Optional: electric half-width shut-off via ISOBUS Terminal

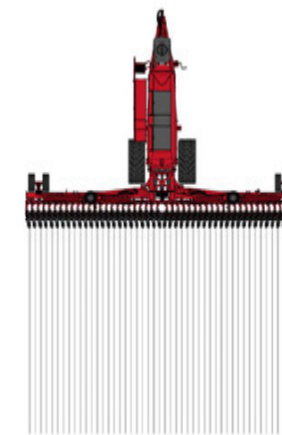

Ultimate efficiency due to 8-12 m working width



Saving seed due to half-width shut-off

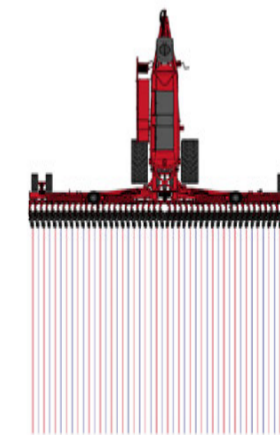

Selective hosing – two different seeds



Selective hosing – row spacing can be doubled from 25 cm to 50 cm

# Selective hosing

Optionally, a selective hosing can be selected for the Avatar 12.25 SD. This allows for two other applications. For example, the row spacing of 25 cm can be doubled to 50 cm or two different crops with different requirements can be sown perfectly at the same time. Fine seeds can be placed shallowly and coarse seeds can be seeded deeper.

- Double row spacing 25 cm or 50 cm
- Two different crops can be sown
- Small seeds can be placed perfectly and simultaneously with coarse seeds
- Due to the individual depth control, every crop is placed at the perfect depth




Four distribution towers for selective hosing

# CLOSING WHEEL SYSTEMS

## Star roller steel

- For sowing in dry soils
- The star roller produces crumbly fine soil
- The down force of the closing wheels can be adjusted by means of a spring without any tools
- Depending on the conditions, the angle can be changed

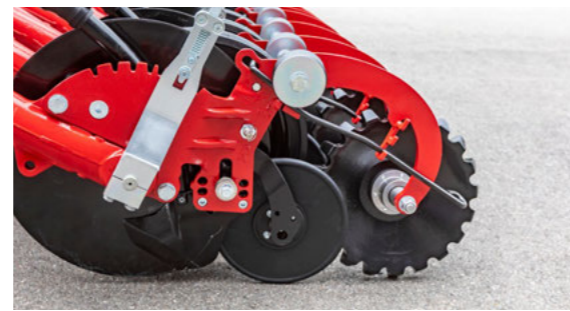

Steel star roller produces fine soil and closes the seed furrow

## Closing wheel steel

- For sowing in wet conditions
- Closes the seed furrow even in changing conditions
- Ideal with the offset method
- The down force of the closing wheels can be adjusted by means of a spring without any tools
- Depending on the conditions, the angle can be changed




Closed closing wheel for all situations

## Trash wheels

- Avoiding the adding of organic material
- Three different options for all situations
- Hydraulically operated
- Suspended via rubber toson, thus low-wear
- Perfect contour following due to individual suspension

Hairpinning is a well-known term in no-till farming. But what does it mean? The effect when straw residues or organic residues are pressed into the seed furrow is called hairpinning. This can become a problem if the seed is placed on the straw residues or organic residues as the connection to the capillaries of the soil is interrupted. Trash wheels can be used to prevent this.

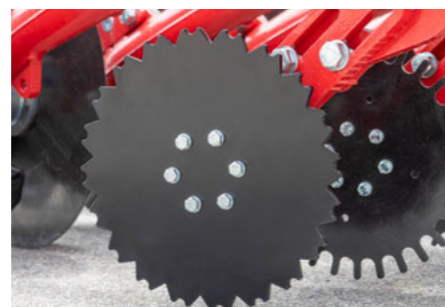

Trash wheel for cereal straw

Trash wheels for high amounts of cereal straw

Trash wheel for maize straw

# SEED FIXING

## Catching roller

Due to the catching roller, the seed is placed perfectly in the seed furrow to create a connection to capillarity. When sowing in very wet conditions, the catching roller can be set to the parking position with one simple step. Thus, it is possible to continue sowing in wet conditions. If working in wet conditions for a longer time, it makes sense to replace the catching roller with the uniformer.

- Safe placement of the seed
- Ideal in dry soils
- Remove the catching roller in wet conditions
- Due to the parking position, the catching roller can be lifted



Perfect fixation of the seed due to rubber catching roller

## Uniformer

Due to the Uniformer, the seed is pressed in to the seed furrow. This principle is already known from the Turbo-Disc seed coulters of the Pronto. The Uniformer is also ideal for green catch crops.

- Safe placement of the seed in the furrow
- Can be used in all situations
- Ideal when sowing into green catch crops
- Ideal in wet conditions



Uniformer Avatar

# DIGITAL SERVICES

## eosT10 (Pro)

- High-resolution 10" terminal for controlling all ISOBUS devices according to ISO 11783
- Reliable and powerful: a high-performance hardware combined with an intuitive, user-friendly operation in daytime or night mode
- Straightforward transfer of application maps with the wireless Task Data Exchange
- Various layout options allow for a simultaneous display of several applications – for an optimum overview
- eosT10 and eosT10 Pro – one hardware, completed by two licence kits. Precision is always standard for us.



By displaying up to 3 widgets in addition to the main working screen, the user can keep track of several applications at the same time

## Rotor selection

- Facilitates the selection of the optimum rotor for any application
- Wide selection range from normal seeds to fine seeds to fertiliser and micro-granular compound
- Expert mode to carry out rotor configurations also for variable operating speeds and application rates




## AutoLine

- Automatic, GPS-based tramline control
- Optimised driving strategy near obstacles or on the headlands
- Track-to-track driving is no longer required
- Available in combination with the terminal eosT10 Pro

## HorschConnect

Prepare today for tomorrow. Control different machine functions quite easily via the MobileControl app – your smartphone replaces the terminal! In addition, gain complete, transparent insight in all aspects of work performance and working quality with HorschConnect Telematics.

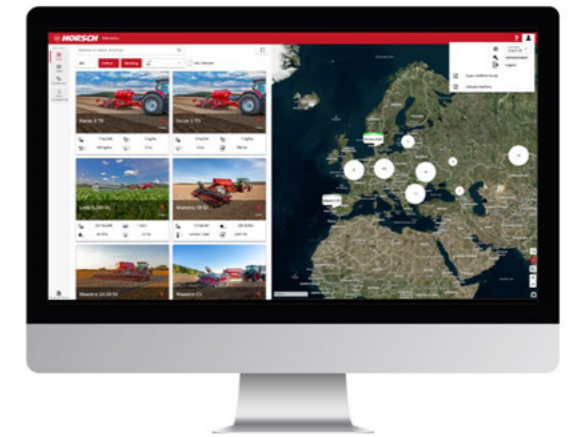

With HorschConnect telemetry solutions can be found in the sowing and plant protection sector – exactly where they make sense

- Digital solutions exactly where they make sense
- Straightforward out-of-the-box solution with integrated SIM card, WLAN modem and other interfaces
- HorschConnect Telematics to document the performance of the machine
- HorschConnect Telematics for complete transparency of the working quality, e.g the application rate of all components
- Targeted and proactive service due to remote insight in the error messages
- Control of machine functions via smartphone app MobileControl: e.g. calibration of all metering units



The MobileControl app allows for controlling individual machine functions – completely comfortably from the smartphone




Due to the flexible holder, the eosT10 can be perfectly integrated in every cabin



The rotor selection app facilitates the selection of the optimum rotor for any application



Straightforward out-of-the-box solution with a wide range of integrated interfaces

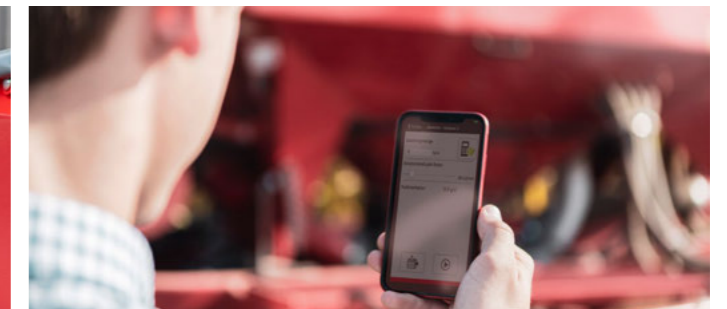

Quick and easy calibration of the machine via smartphone with the MobileControl app

# TECHNICAL DATA

Avatar 8 - 12 SD	8 SD	9 SD	10 SD	12 SD
Working width (m)	8.00	9.00	10.00	12.00
Transport width (m)	2.98	2.98	2.98	2.98
Transport height (m)	3.98	3.98	3.98	3.98
Length (m)	8.72	8.72	8.72	8.72
Axle load (kg)	7000 - 8700	7300 - 9200	7800 - 10000	8400 - 10500
Vertical load (kg)	800 - 1500	1000 - 1600	1200 - 2000	1600 - 2500
Seed hopper capacity double hopper (l)	6300 (40 : 60 / 2500 : 3800)	6300 (60 : 40 / 2500 : 3800)	6300 (40 : 60 / 2500 : 3800)	6300 (40 : 60 / 2500 : 3800)
Seed hopper capacity triple hopper (l)	6400 (30 : 10 : 60 / 1920 : 640 : 3840)	6400 (30 : 10 : 60 / 1920 : 640 : 3840)	6400 (30 : 10 : 60 / 1920 : 640 : 3840)	6400 (30 : 10 : 60 / 1920 : 640 : 3840)
Hopper capacity MiniDrill (l)	400	400	400	400
Feed opening double hopper (m)	per 1,36 x 0,72	per 1,36 x 0,72	per 1,36 x 0,72	per 0.66x0.94
Feed opening triple hopper (m)	1.06 / 0.3 / 1.36 x 0.72	1.06 / 0.3 / 1.36 x 0.72	1.06 / 0.3 / 1.36 x 0.72	1.06 / 0.3 / 1.36 x 0.72
Number of seed coulters (PCE)	32	36	40	48 / 24
Coulter pressure seed coulters (kg)	350	350	350	350
Seed coulter Ø (cm)	48	48	48	48
Closing wheels Ø (cm)	33	33	33	33
Depth control wheels Ø (cm)	40	40	40	40
Row spacing (cm)	25	25	25	25 / 50
Tyre size seed unit/ waggon	520/85 R 38, 580/70 R 38, 710/70 R 38, 900/60 R 32, Twin tyres 520/85 R 42	520/85 R 38, 580/70 R 38, 710/70 R 38, 900/60 R 32, Twin tyres 520/85 R 42	520/85 R 38, 580/70 R 38, 710/70 R 38, 900/60 R 32, Twin tyres 520/85 R 42	520/85 R 38, 580/70 R 38, 710/70 R 38, 900/60 R 32, Twin tyres 520/85 R 42
Tyre size support wheels	Single support wheels 10.8/75-15,3	Single support wheels 10.8/75-15,3	Single support wheels 10.8/75-15,3	Double support wheels 10.8/75-15.3
Operational speed (km/h)	6 - 15	6 - 15	6 - 15	6 - 15
Horsepower requirement (kW/hp)	160 / 220	180 / 250	205 / 280	220 / 300
DA control devices	2	2	2	2
Depressurized return flow (max. 5 bar) (BAR)	1	1	1	1
Oil quantity hydraulic fan (l/min)	35 - 45	35 - 40	35 - 45	35 - 45
Implement attachment adjustable drawbar (mm)	Ring hitch Ø 58 - 79 mm	Ring hitch Ø 58 - 79 mm	Ring hitch Ø 58 - 79 mm	Ring hitch Ø 58-79 mm
Implement attachment ball head	K 80	K 80	K 80	K 80







Your distributor

**HORSCH Maschinen GmbH**  
Sitzenhof 1 · 92421 Schwandorf  
Phone: +49 9431 7143-0  
Fax: +49 9431 7143-9200  
E-Mail: [info@horsch.com](mailto:info@horsch.com)

**[horsch.com](http://horsch.com)**

Paper: 120g/qm Maxi Offset. The paper is certified according to the EU Ecolabel. This label is only granted for products and services whose environmental consequences are considerably lower than those of comparable products. For more details see [www.eu-ecolabel.de](http://www.eu-ecolabel.de). Printing ink: Printing ink QUICKFAST COFREE. Free from mineral oil and cobalt. Moreover, it is certified and recommended for printing according to the „Cradle-to-Cradle“ principle (quasi “from the origin back to the origin”) – an approach that deals with the spreading of continuous and consequent recycling management. For more details see [www.c2c-ev.de](http://www.c2c-ev.de).

All specifications and diagrams are approximate and not binding. Technical features and design are subject to change.

EN-60119711 (11/2023)