

# Leeb VT




FLEXIBILITY AND PRECISION


# Leeb VT

The HORSCH Leeb VT excels due to its flexibility in the cabin as well as to the outside. In the cabin, the farmer can install almost all current terminals to create a familiar user environment. On the outside, polyethylene tanks with a capacity of 5 000 und 6 000 l and booms up to a working width of 48 m are available. With regard to the drive, the farmer can choose how much power he requires for his conditions


- Extremely comfortable chassis ComfortDrive: hydropneumatic individual wheel suspension with active level regulation
- Variable track adjustment from 1.80 m to 2,40 m
- High, continuous clearance of 1.30 m in field mode
- Practical control terminal and an ergonomic joystick for an intuitive operation, perfectly adapted to the application requirements

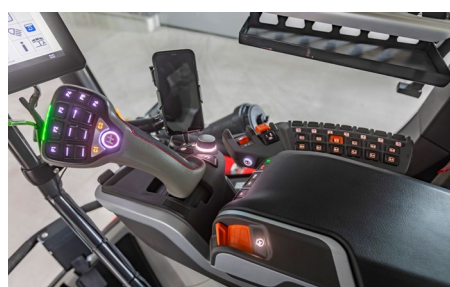

Ergonomic control lever with multi-configurable keys

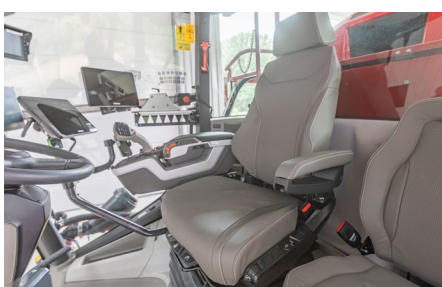

Cabin Pro with comfort leather seat and leather passenger seat

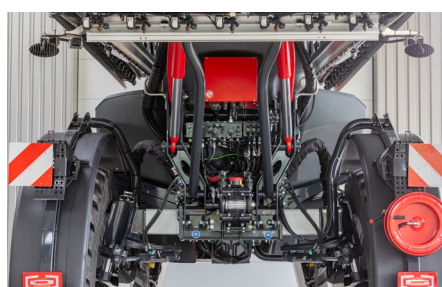

Slide axles that are arranged one after the other and hydropneumatic suspension

## TECHNICAL DATA

Leeb VT	5.230 VT	6.300 VT
Mixture tank nominal volume (l)	5000	6000
Water-cooled engine	FPT (Fiat Powertrain Technologies) N67	FPT (Fiat Powertrain Technologies) N67
Nominal power (for rpm) (kW/hp)	159 / 216 (2300)	212 / 288 (2200)
Maximum power (for rpm) (kW/hp)	165 / 224 (1900)	230 / 313 (2000)
Cylinder number/cooling	6 / water / turbo with intercooler	6 / water / turbo with intercooler
Cylinder capacity (cm <sup>3</sup> )	6700	6700
Max. torque (Nm/Speed)	942 / 1500	1160 / 1500
Control	Elektronik EMR	Elektronik EMR
Tank capacity diesel/AdBlue (l)	approx. 450 / 45	approx. 450 / 45
Emission standard	Tier 5	Tier 5
Working widths (m)	24 - 48	24 - 48

Your distributor

**HORSCH LEEB Application Systems GmbH**  
 Kleegartenstraße 54  
 94405 Landau an der Isar  
 Phone: +49 9951 6041-0  
 Fax: +49 9951 6041-3092  
 E-Mail: [info@horsch.com](mailto:info@horsch.com)

**[horsch.com](http://horsch.com)**

Paper: 120g/qm Maxi Offset. The paper is certified according to the EU Ecolabel. This label is only granted for products and services whose environmental consequences are considerably lower than those of comparable products. For more details see [www.eu-ecolabel.de](http://www.eu-ecolabel.de). Printing ink: Printing ink QUICKFAST COFREE. Free from mineral oil and cobalt. Moreover, it is certified and recommended for printing according to the „Cradle-to-Cradle“ principle (quasi “from the origin back to the origin”) – an approach that deals with the spreading of continuous and consequent recycling management. For more details see [www.c2c-ev.de](http://www.c2c-ev.de).

All specifications and diagrams are approximate and not binding. Technical features and design are subject to change.

EN-60119731 (11/2023)